



Urethane Coatings Monothane HS50 GLOSS gives High Gloss Shine to Greek Church

USE QUALITY, USE URETHANE COATINGS

A new parquet flooring was recently installed at **Sts Anargiri** a beautiful Greek Church in Oakleigh, Melbourne, Australia.

Following all the prep work and the laying of the parquet flooring, the flooring contractor used Urethane Coatings proven system Timberseal for the first coat. A rapid drying polyurethane timber sealer suitable for all timber species, cork and particle board.


Monothane HS50 GLOSS is a transparent, single pack, moisture cure polyurethane that provides a hard wearing gloss finish while maintaining the natural character of the timber.

For a High Gloss Finish use:

1. LAYING THE FLOOR




2. SANDING THE FLOOR



Timberseal is very flexible and when worked well into tongue and groove seams prevents entry of the subsequent coat of polyurethane (Monothane HS50 GLOSS) and virtually eliminate edge bonding.

Once the Timberseal was applied this was followed by 3 coats of Monothane HS50 GLOSS to give a durable high gloss finish to a high traffic area.

3. FINISHED FLOOR

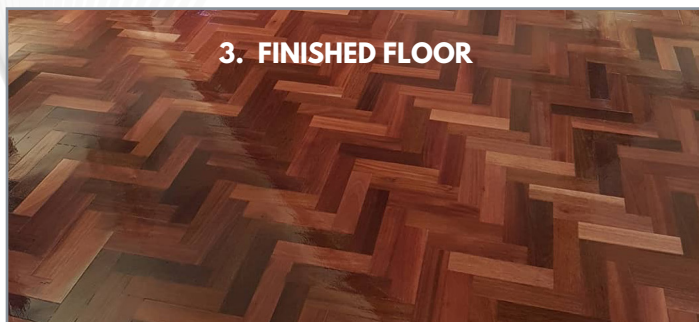

For more information on Urethane Coatings product range please visit www.urethanecoatings.com.au or contact us on +61 2 9666 3788