

When Timberseal and WaterKote® Kick Blackbutt

Taking care of your timber


The homeowner of this property wanted their Blackbutt timber floor protecting, they required a hard wearing system that would bring out the rich deep tones of their timber while resulting in a natural silky satin finish.

The contractor chose to use **Urethane Coatings TIMBERSEAL** for the first coat.

TIMBERSEAL is a fast drying solvent based coating that was developed as a first coat for all species of Hardwoods so was an ideal choice for this Australian Blackbutt flooring.

TIMBERSEAL is a highly flexible coating so it will virtually eliminate edge bonding when it is heavily applied and worked into the seams, thereby preventing entry of any subsequent coatings to the timber. By using **TIMBERSEAL** for the first coat this ensured the natural deep colours of the timber would be accentuated.

Once coated with **TIMBERSEAL** the floor was then coated with two coats of **WaterKote™ 2K Satin**, resulting in the desired silky satin finish.

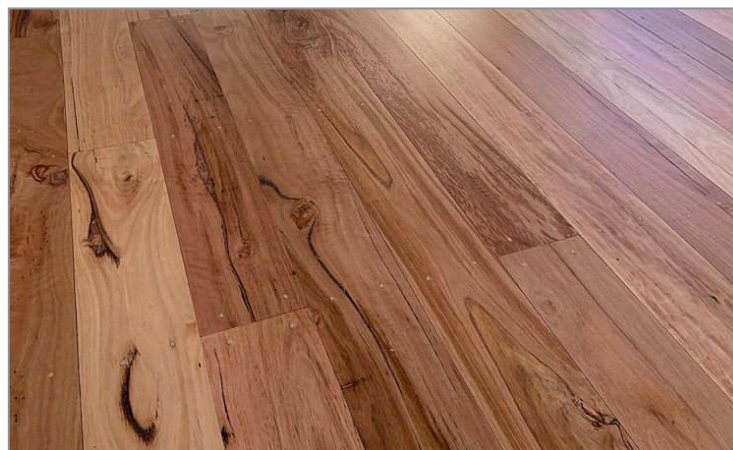

A Beautiful Natural Satin Finish



TIMBERSEAL

QUICK DRYING SEALER CORK & TIMBER SEALER



WaterKote™ 2K SATIN

A NEW generation 2 component water borne polyurethane

Extended open time

Exceptional flow and levelling.

Can be walked on after 24 hours

Full Cure 5 - 7 days after application

For more information:
www.urethanecoatings.com.au
+61 2 9666 3788

www.urethanecoatings.com.au

Urethane Coatings | 2-4 Green Street Banksmeadow | NSW 2019 Australia
Tel: 02 9666 3888 | Fax: 02 9666 4805 | Website: www.urethanecoatings.com.au

